

(12) **UK Patent Application** (19) **GB** (11) **2 406 125** (13) **A**

(43) Date of Printing by UK Office 23.03.2005

(21) Application No: 0428141.6


(22) Date of Filing: 17.04.2003

(30) Priority Data:
(31) 60383917 (32) 29.05.2002 (33) US(86) International Application Data:
PCT/US2003/011765 En 17.04.2003(87) International Publication Data:
WO2003/102365 En 11.12.2003(71) Applicant(s):
Enventure Global Technology
(Incorporated in USA - Delaware)
16200 A Park Row, Houston, Texas 77084,
United States of America(72) Inventor(s):
Lev Ring

(continued on next page)

(51) INT CL⁷:
E21B 43/10(52) UK CL (Edition X):
E1F FLA(56) Documents Cited by ISA:
US 4871199 A US 4581817 A
US 4422317 A US 4388752 A
US 3353599 A(58) Field of Search by ISA:
Other: US: 166/207,206,217,382;285/382.4,382.5(54) Abstract Title: **System for radially expanding a tubular member**

(57) A system for radially expanding a tubular member (14).

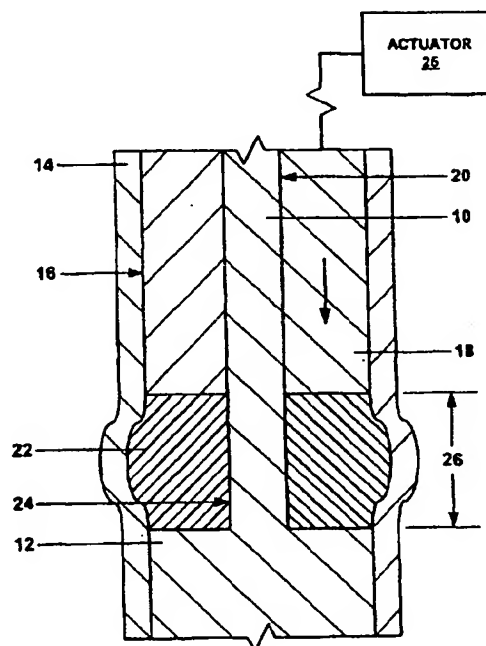

GB 2 406 125

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 December 2003 (11.12.2003)


PCT

(10) International Publication Number
WO 03/102365 A1

- (51) International Patent Classification⁷: **E21B 43/10** (74) Agents: **MATTINGLY, Todd et al.**; Haynes and Boone, LLP, 1000 Louisiana Street, Suite 4300, Houston, TX 77002-5012 (US).
- (21) International Application Number: **PCT/US03/11765**
- (22) International Filing Date: **17 April 2003 (17.04.2003)** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
60/383,917 **29 May 2002 (29.05.2002)** **US**
- (71) Applicant (*for all designated States except US*): **EVEN-TURE GLOBAL TECHNOLOGY [US/US]**; 16200 A Park Row, Houston, TX 77084 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **RING, Lev [US/US]**; 14220 Heatherhill Place, Houston, TX 77077 (US).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **SYSTEM FOR RADIALLY EXPANDING A TUBULAR MEMBER**

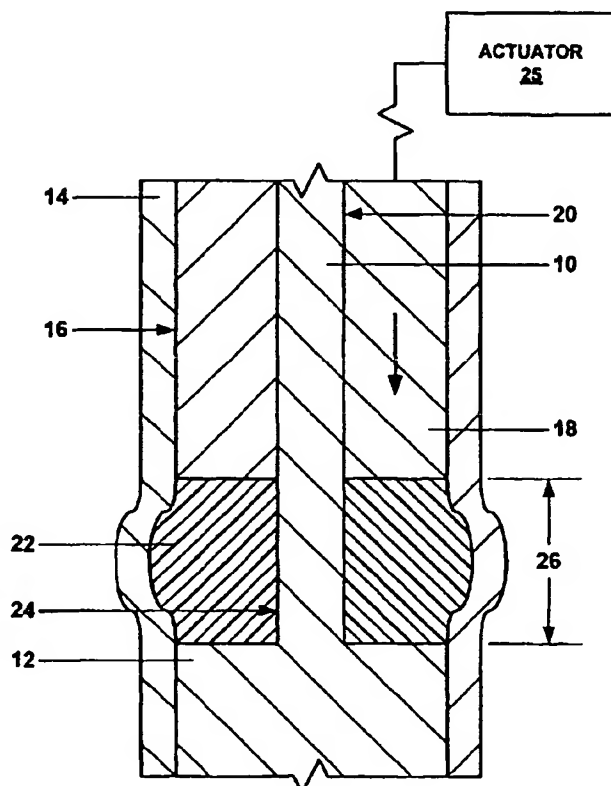

(57) Abstract: A system for radially expanding a tubular member (14).

WO 03/102365 A1



Declaration under Rule 4.17:

- *of inventorship (Rule 4.17(iv)) for US only*

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SYSTEM FOR RADially EXPANDING A TUBULAR MEMBER**Cross Reference To Related Applications**

[001] The present application claims the benefit of the filing dates of (1) U.S. provisional patent application serial no. 60/383,917, attorney docket no 25791.89, filed on 5/29/2002, the disclosure of which is incorporated herein by reference.

[002] The present application is related to the following: (1) U.S. patent application serial no. 09/454,139, attorney docket no. 25791.03.02, filed on 12/3/1999, (2) U.S. patent application serial no. 09/510,913, attorney docket no. 25791.7.02, filed on 2/23/2000, (3) U.S. patent application serial no. 09/502,350, attorney docket no. 25791.8.02, filed on 2/10/2000, (4) U.S. patent application serial no. 09/440,338, attorney docket no. 25791.9.02, filed on 11/15/1999, (5) U.S. patent application serial no. 09/523,460, attorney docket no. 25791.11.02, filed on 3/10/2000, (6) U.S. patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, (7) U.S. patent application serial no. 09/511,941, attorney docket no. 25791.16.02, filed on 2/24/2000, (8) U.S. patent application serial no. 09/588,946, attorney docket no. 25791.17.02, filed on 6/7/2000, (9) U.S. patent application serial no. 09/559,122, attorney docket no. 25791.23.02, filed on 4/26/2000, (10) PCT patent application serial no. PCT/US00/18635, attorney docket no. 25791.25.02, filed on 7/9/2000, (11) U.S. provisional patent application serial no. 60/162,671, attorney docket no. 25791.27, filed on 11/1/1999, (12) U.S. provisional patent application serial no. 60/154,047, attorney docket no. 25791.29, filed on 9/16/1999, (13) U.S. provisional patent application serial no. 60/159,082, attorney docket no. 25791.34, filed on 10/12/1999, (14) U.S. provisional patent application serial no. 60/159,039, attorney docket no. 25791.36, filed on 10/12/1999, (15) U.S. provisional patent application serial no. 60/159,033, attorney docket no. 25791.37, filed on 10/12/1999, (16) U.S. provisional patent application serial no. 60/212,359, attorney docket no. 25791.38, filed on 6/19/2000, (17) U.S. provisional patent application serial no. 60/165,228, attorney docket no. 25791.39, filed on 11/12/1999, (18) U.S. provisional patent application serial no. 60/221,443, attorney docket no. 25791.45, filed on 7/28/2000, (19) U.S. provisional patent application serial no. 60/221,645, attorney docket no. 25791.46, filed on 7/28/2000, (20) U.S. provisional patent application serial no. 60/233,638, attorney docket no. 25791.47, filed on 9/18/2000, (21) U.S. provisional patent application serial no. 60/237,334, attorney docket no. 25791.48, filed on 10/2/2000, (22) U.S. provisional patent application serial no. 60/270,007, attorney docket no. 25791.50, filed on 2/20/2001, (23) U.S. provisional patent application serial no. 60/262,434, attorney docket no. 25791.51, filed on 1/17/2001, (24) U.S. provisional patent application serial no. 60/259,486, attorney docket no. 25791.52, filed on 1/3/2001, (25) U.S. provisional patent application serial no. 60/303,740, attorney docket no. 25791.61, filed on 7/6/2001, (26) U.S. provisional patent application serial no. 60/313,453, attorney docket no. 25791.59, filed on 8/20/2001, (27) U.S. provisional patent application serial no. 60/317,985, attorney docket no. 25791.67, filed on 9/6/2001, (28) U.S. provisional patent application serial no. 60/3318,386, attorney docket no.

25791.67.02, filed on 9/10/2001, (29) U.S. utility patent application serial no. 09/969,922, attorney docket no. 25791.69, filed on 10/3/2001, (30) U.S. utility patent application serial no. 10/016,467, attorney docket no. 25791.70, filed on 12/10/2001; (31) U.S. provisional patent application serial no. 60/343,674, attorney docket no. 25791.68, filed on 12/27/2001; (32) U.S. provisional patent application serial no. 60/346,309, attorney docket no. 25791.92, filed on 1/7/2002; (33) U.S. provisional patent application serial no. 60/372,048, attorney docket no. 25791.93, filed on 4/12/2002; (34) U.S. provisional patent application serial no. 60/372,632, attorney docket no. 25791.101, filed on 4/15/2002; and (35) U.S. provisional patent application serial no. 60/380,147, attorney docket no. 25791.104, filed on 5/6/2002, the disclosures of which are incorporated herein by reference.

Background of the Invention

[003] This invention relates generally to oil and gas exploration, and in particular to forming and repairing wellbore casings to facilitate oil and gas exploration and production.

[004] Conventionally, when a wellbore is created, a number of casings are installed in the borehole to prevent collapse of the borehole wall and to prevent undesired outflow of drilling fluid into the formation or inflow of fluid from the formation into the borehole. The borehole is drilled in intervals whereby a casing which is to be installed in a lower borehole interval is lowered through a previously installed casing of an upper borehole interval. As a consequence of this procedure the casing of the lower interval is of smaller diameter than the casing of the upper interval. Thus, the casings are in a nested arrangement with casing diameters decreasing in downward direction. Cement annuli are provided between the outer surfaces of the casings and the borehole wall to seal the casings from the borehole wall. As a consequence of this nested arrangement a relatively large borehole diameter is required at the upper part of the wellbore. Such a large borehole diameter involves increased costs due to heavy casing handling equipment, large drill bits and increased volumes of drilling fluid and drill cuttings. Moreover, increased drilling rig time is involved due to required cement pumping, cement hardening, required equipment changes due to large variations in hole diameters drilled in the course of the well, and the large volume of cuttings drilled and removed.

[005] The present invention is directed to overcoming one or more of the limitations of the existing processes for forming and repairing wellbore casings.

Summary of the Invention

[006] According to one aspect of the present invention, a method of radially expanding and plastically deforming at least a portion of an expandable tubular member is provided that includes positioning a resilient member within the interior of the expandable tubular member, and compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member.

[007] According to another aspect of the present invention, a system for radially expanding and plastically deforming at least a portion of an expandable tubular member is provided that includes means for positioning a resilient member within the interior of the expandable tubular member, and

means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member.

[008] According to another aspect of the present invention, an apparatus for radially expanding and plastically deforming an expandable tubular member is provided that includes a support member, a resilient member coupled to the support member, and an actuator operably coupled to the resilient member for controllably compressing the resilient member to thereby radially expand and plastically deform the expandable tubular member.

Brief Description of the Drawings

[009] Fig. 1a is a fragmentary cross-sectional illustration of an exemplary embodiment of an apparatus for radially expanding and plastically deforming a tubular member.

[0010] Fig. 1b is a fragmentary cross-sectional illustration of the apparatus of Fig. 1a after compressing the resilient expansion member to radially expand and plastically deform a portion of the expandable tubular member.

[0011] Fig. 1c is a fragmentary cross-sectional illustration of the apparatus of Fig. 1b after permitting the resilient expansion member to re-expand in the longitudinal direction.

[0012] Fig. 1d is a fragmentary cross-sectional illustration of the apparatus of Fig. 1c after removing the resilient expansion member from the expandable tubular member.

[0013] Fig. 1e is a fragmentary cross sectional illustration of the apparatus of Fig. 1d after positioning an adjustable expansion cone within the radially expanded and plastically deformed portion of the expandable tubular member.

[0014] Fig. 1f is a fragmentary cross-sectional illustration of the apparatus of Fig. 1e after expanding the adjustable expansion cone within the radially expanded and plastically deformed portion of the expandable tubular member.

[0015] Fig. 1g is a fragmentary cross sectional illustration of the apparatus of Fig. 1f after displacing the adjustable expansion cone relative to the expandable tubular member to radially expand and plastically deform at least a portion of the expandable tubular member.

[0016] Fig. 2a is a fragmentary cross-sectional illustration of the apparatus of Fig. 1a after being positioned within a preexisting structure.

[0017] Fig. 2b is a fragmentary cross sectional of the apparatus of Fig. 2a after compressing the resilient expansion member to radially expand and plastically deform a portion of the expandable tubular member into intimate contact with the interior surface of the preexisting structure.

[0018] Fig. 2c is a fragmentary cross-sectional illustration of the apparatus of Fig. 2b after permitting the resilient expansion member to re-expand in the longitudinal direction.

[0019] Fig. 2d is a fragmentary cross-sectional illustration of the apparatus of Fig. 2c after removing the resilient expansion member from the expandable tubular member.

[0020] Fig. 2e is a fragmentary cross sectional illustration of the apparatus of Fig. 2d after positioning an adjustable expansion cone within the radially expanded and plastically deformed portion of the expandable tubular member.

[0021] Fig. 2f is a fragmentary cross-sectional illustration of the apparatus of Fig. 2e after expanding the adjustable expansion cone within the radially expanded and plastically deformed portion of the expandable tubular member.

[0022] Fig. 2g is a fragmentary cross sectional illustration of the apparatus of Fig. 2f after displacing the adjustable expansion cone relative to the expandable tubular member to radially expand and plastically deform at least a portion of the expandable tubular member.

[0023] Fig. 3 is a fragmentary cross-sectional illustration of the radial expansion and plastic deformation of the expandable tubular member of Fig. 2a at a plurality of discrete locations by repeating the operational steps of Figs. 2a-2c a plurality of times within the preexisting structure.

[0024] Fig. 4 is a fragmentary cross sectional illustration of an alternative embodiment of the apparatus of Fig. 1a in which an adjustable expansion cone is provided below the resilient expansion member.

Detailed Description of the Illustrative Embodiments

[0025] Referring to Fig. 1a, a cylindrical member 10 that includes a flange 12 at one end is positioned within a first tubular member 14 that defines a passage 16 for receiving and mating with the flange of the cylindrical member. A second tubular member 18 that is received within and mates with the passage 16 of the first tubular member 14 defines a passage 20 that receives and mates with another end of the cylindrical member 10, and a third tubular member 22 that is also received within and mates with the passage of the first tubular member defines a passage 24 that receives and mates with an intermediate portion of the cylindrical member. In this manner, the third tubular member 22 is positioned between an end face of the second tubular member 18 and an end face of the flange 12 of the cylindrical member 10. An actuator 25 is operably coupled to the second tubular member 18 for controllably displacing the second tubular member relative to the cylindrical member 10 in the longitudinal direction. In an exemplary embodiment, the cylindrical member 10, the first tubular member 14, and the second tubular member 18 are fabricated from rigid materials such as, for example, aluminum or steel, and the third tubular member 22 is fabricated from resilient materials such as, for example, natural rubber, synthetic rubber, and/or an elastomeric material.

[0026] In an exemplary embodiment, as illustrated in Fig. 1b, the second tubular member 18 is then displaced downwardly in the longitudinal direction toward the flange 12 of the cylindrical member 10 by the actuator 25. As a result, the resilient third tubular member 22 is compressed in the longitudinal direction and expanded in the radial direction thereby radially expanding and plastically deforming the portion 26 of the first tubular member 14 proximate the radially expanded portion of the third tubular member 22. In an experimental implementation, the inside diameter of the portion

26 of the first tubular member 14 proximate the radially expanded portion of the third resilient tubular member 22 was unexpectedly increased by up to about 22 percent.

[0027] In an exemplary embodiment, as illustrated in Fig. 1c, the second tubular member 18 is then displaced upwardly in the longitudinal direction away from the flange 12 of the cylindrical member 10 by the actuator 25. As a result, the resilient third tubular member 22 is no longer compressed in the longitudinal direction or expanded in the radial direction. As a result, as illustrated in Fig. 1d, the cylindrical member 10, the second tubular member 18, and the third tubular member 22 may then be removed from the passage 16 of the first tubular member 14.

[0028] In an exemplary embodiment, as illustrated in Fig. 1e, an adjustable expansion cone 28 is then positioned within the radially expanded portion 26 of the first tubular member 14 using a support member 30.

[0029] In an exemplary embodiment, as illustrated in Fig. 1f, the outside diameter of the adjustable expansion cone 28 is then increased to mate with the inside surface of at least a portion of the radially expanded portion 26 of the first tubular member 14. The adjustable expansion cone 28 is then displaced upwardly relative to the first tubular member 14. In several alternative embodiments, the adjustable expansion cone 28 is displaced upwardly relative to the first tubular member 14 by pulling the adjustable expansion cone 28 upwardly and/or by pressurizing the region 32 of the first tubular member below the adjustable expansion cone. In an exemplary embodiment, as illustrated in Fig. 1g, as a result of the upward displacement of the adjustable expansion cone 28 relative to the first tubular member 14, an upper portion 34 of the first tubular member is radially expanded and plastically deformed.

[0030] In several exemplary embodiments, the upper portion 34 of the first tubular member 14 is radially expanded and plastically deformed using the adjustable expansion cone 28 in a conventional manner and/or using one or more of the methods and apparatus disclosed in one or more of the following: (1) U.S. patent application serial no. 09/454,139, attorney docket no. 25791.03.02, filed on 12/3/1999, (2) U.S. patent application serial no. 09/510,913, attorney docket no. 25791.7.02, filed on 2/23/2000, (3) U.S. patent application serial no. 09/502,350, attorney docket no. 25791.8.02, filed on 2/10/2000, (4) U.S. patent application serial no. 09/440,338, attorney docket no. 25791.9.02, filed on 11/15/1999, (5) U.S. patent application serial no. 09/523,460, attorney docket no. 25791.11.02, filed on 3/10/2000, (6) U.S. patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, (7) U.S. patent application serial no. 09/511,941, attorney docket no. 25791.16.02, filed on 2/24/2000, (8) U.S. patent application serial no. 09/588,946, attorney docket no. 25791.17.02, filed on 6/7/2000, (9) U.S. patent application serial no. 09/559,122, attorney docket no. 25791.23.02, filed on 4/26/2000, (10) PCT patent application serial no. PCT/US00/18635, attorney docket no. 25791.25.02, filed on 7/9/2000, (11) U.S. provisional patent application serial no. 60/162,671, attorney docket no. 25791.27, filed on 11/1/1999, (12) U.S. provisional patent application serial no. 60/154,047, attorney docket no. 25791.29, filed on 9/16/1999, (13) U.S. provisional patent application

serial no. 60/159,082, attorney docket no. 25791.34, filed on 10/12/1999, (14) U.S. provisional-patent application serial no. 60/159,039, attorney docket no. 25791.36, filed on 10/12/1999, (15) U.S. provisional patent application serial no. 60/159,033, attorney docket no. 25791.37, filed on 10/12/1999, (16) U.S. provisional patent application serial no. 60/212,359, attorney docket no. 25791.38, filed on 6/19/2000, (17) U.S. provisional patent application serial no. 60/165,228, attorney docket no. 25791.39, filed on 11/12/1999, (18) U.S. provisional patent application serial no. 60/221,443, attorney docket no. 25791.45, filed on 7/28/2000, (19) U.S. provisional patent application serial no. 60/221,645, attorney docket no. 25791.46, filed on 7/28/2000, (20) U.S. provisional patent application serial no. 60/233,638, attorney docket no. 25791.47, filed on 9/18/2000, (21) U.S. provisional patent application serial no. 60/237,334, attorney docket no. 25791.48, filed on 10/2/2000, (22) U.S. provisional patent application serial no. 60/270,007, attorney docket no. 25791.50, filed on 2/20/2001, (23) U.S. provisional patent application serial no. 60/262,434, attorney docket no. 25791.51, filed on 1/17/2001, (24) U.S. provisional patent application serial no. 60/259,486, attorney docket no. 25791.52, filed on 1/3/2001, (25) U.S. provisional patent application serial no. 60/303,740, attorney docket no. 25791.61, filed on 7/6/2001, (26) U.S. provisional patent application serial no. 60/313,453, attorney docket no. 25791.59, filed on 8/20/2001, (27) U.S. provisional patent application serial no. 60/317,985, attorney docket no. 25791.67, filed on 9/6/2001, (28) U.S. provisional patent application serial no. 60/3318,386, attorney docket no. 25791.67.02, filed on 9/10/2001, (29) U.S. utility patent application serial no. 09/969,922, attorney docket no. 25791.69, filed on 10/3/2001, (30) U.S. utility patent application serial no. 10/016,467, attorney docket no. 25791.70, filed on 12/10/2001; (31) U.S. provisional patent application serial no. 60/343,674, attorney docket no. 25791.68, filed on 12/27/2001; (32) U.S. provisional patent application serial no. 60/346,309, attorney docket no. 25791.92, filed on 1/7/2002; (33) U.S. provisional patent application serial no. 60/372,048, attorney docket no. 25791.93, filed on 4/12/2002; (34) U.S. provisional patent application serial no. 60/372,632, attorney docket no. 25791.101, filed on 4/15/2002; and (35) U.S. provisional patent application serial no. 60/380,147, attorney docket no. 25791.104, filed on 5/6/2002, the disclosures of which are incorporated herein by reference.

[0031] In several alternative embodiments, the upper portion 34 of the first tubular member 14 is radially expanded and plastically deformed using other conventional methods for radially expanding and plastically deforming tubular members such as, for example, internal pressurization and/or roller expansion devices such as, for example, that disclosed in U.S. patent application publication no. US 2001/0045284 A1, the disclosure of which is incorporated herein by reference.

[0032] In several alternative embodiments, the lower portion 36 of the first tubular member 14 is radially expanded and plastically deformed instead of, or in addition to, the upper portion 34.

[0033] Referring to Fig. 2a, in an alternative embodiment, the cylindrical member 10, the first tubular member 14, the second tubular member 18, and the third tubular member 22 are positioned

within the interior of a preexisting structure 38. In several exemplary embodiments, the preexisting structure 38 may be a wellbore, a wellbore casing, a pipeline, or a structural support.

[0034] In an exemplary embodiment, as illustrated in Fig. 2b, the second tubular member 18 is then displaced downwardly in the longitudinal direction toward the flange 12 of the cylindrical member 10 using the actuator 25. As a result, the resilient third tubular member 22 is compressed in the longitudinal direction and expanded in the radial direction thereby radially expanding and plastically deforming the portion 26 of the first tubular member 14 proximate the radially expanded portion of the third tubular member 22 into intimate contact with the interior surface of the preexisting structure 38. In an experimental implementation, the inside diameter of the portion 26 of the first tubular member 14 proximate the radially expanded portion of the third resilient tubular member 22 was unexpectedly increased by up to about 22 percent. In an experimental implementation, the contact pressure between the radially expanded and plastically deformed portion 26 of the first tubular member 14 and the interior surface of the preexisting structure 38 provided a fluid tight seal and supported the first tubular member.

[0035] In an exemplary embodiment, as illustrated in Fig. 2c, the second tubular member 18 is then displaced upwardly in the longitudinal direction away from the flange 12 of the cylindrical member 10 using the actuator 25. As a result, the resilient third tubular member 22 is no longer compressed in the longitudinal direction or expanded in the radial direction. As a result, as illustrated in Fig. 2d, the cylindrical member 10, the second tubular member 18, and the third tubular member 22 may then be removed from the passage 16 of the first tubular member 14.

[0036] In an exemplary embodiment, as illustrated in Fig. 2e, an adjustable expansion cone 28 is then positioned within the radially expanded portion 26 of the first tubular member 14 using a support member 30.

[0037] In an exemplary embodiment, as illustrated in Fig. 2f, the outside diameter of the adjustable expansion cone 28 is then increased to mate with the inside surface of at least a portion of the radially expanded portion 26 of the first tubular member 14. The adjustable expansion cone 28 is then displaced upwardly relative to the first tubular member 14. In several alternative embodiments, the adjustable expansion cone 28 is displaced upwardly relative to the first tubular member 14 by pulling the adjustable expansion cone 28 upwardly and/or by pressurizing the region 32 of the first tubular member below the adjustable expansion cone. In an exemplary embodiment, as illustrated in Fig. 2g, as a result of the upward displacement of the adjustable expansion cone 28 relative to the first tubular member 14, an upper portion 34 of the first tubular member is radially expanded and plastically deformed. In an exemplary experimental implementation, the upward displacement of the adjustable expansion cone 28 relative to the first tubular member 14, caused the upper portion 34 of the first tubular member to be radially expanded and plastically deformed into intimate contact with the interior surface of the preexisting structure.

[0038] In an alternative embodiment, as illustrated in Fig. 3, the first tubular member 14 is radially expanded and plastically deformed into intimate contact with the preexisting structure 38 at a plurality of spaced apart locations by operating the cylindrical member 10, the first tubular member 14, the second tubular member 18, and the third tubular member 22 a plurality of times as described above with reference to Figs. 2a-2c. As a result, radially expanded and plastically deformed portions, 26a and 26b, of the first tubular member 14 are thereby radially expanded and plastically deformed into intimate contact with interior surface of the preexisting structure 38. In an exemplary experimental implementation, the radially expanded and plastically deformed portions, 26a and 26b, of the first tubular member 14 provided a fluid tight seal between the radially expanded portions and the interior surface of the preexisting structure 38. In an exemplary embodiment, the intermediate portion 40 of the first tubular member 14, positioned between the radially expanded and plastically deformed portions, 26a and 26b, of the first tubular member, includes one or more openings, slots, and/or apertures for conveying fluidic materials into and/or out of the first tubular member. In this manner, fluidic materials within a subterranean formation 42 positioned proximate the intermediate portion may be extracted into the interior 16 of the first tubular member. Or, alternatively, fluidic materials may be injected into the subterranean formation. In several alternative embodiments, the subterranean formation 42 may include a source of hydrocarbons such as, for example, petroleum and/or natural gas, and/or a source of geothermal energy.

[0039] In an alternative embodiments, as illustrated in Fig. 4, an adjustable expansion cone 42 is coupled to the cylindrical member 10 below the resilient third tubular member 22. In this manner, during operation, after expanding the resilient tubular member 22 in the radial direction to thereby radially expand and plastically deform the first tubular member 14, the adjustable expansion cone 42 may then be positioned proximate the radially expanded portion of the first tubular member and radially expanded. The adjustable expansion cone 42 may then be displaced upwardly and/or downwardly relative to the first tubular member 14 in the longitudinal direction to thereby radially expand and plastically deform at least a portion of the first tubular member.

[0040] A method of radially expanding and plastically deforming at least a portion of an expandable tubular member has been described that includes positioning a resilient member within the interior of the expandable tubular member, and compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member. In an exemplary embodiment, the inside diameter of the radially expanded portion of the expandable tubular member is increased by up to about 22 percent during the radial expansion and plastic deformation. In an exemplary embodiment, the method further includes positioning an adjustable expansion cone within the radially expanded and plastically deformed portion of the expandable tubular member, expanding the adjustable expansion cone within the radially expanded and plastically deformed portion of the expandable tubular member, and displacing the adjustable expansion cone relative to the expandable tubular member in the longitudinal direction

to radially expand and plastically deform another portion of the expandable tubular member. In an exemplary embodiment, the method further includes decompressing the resilient member within the interior of the expandable tubular member, positioning the resilient member to another location within the interior of the expandable tubular member, and compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform another portion of the expandable tubular member. In an exemplary embodiment, the method further includes positioning the expandable tubular member within a preexisting structure. In an exemplary embodiment, the preexisting structure includes a wellbore. In an exemplary embodiment, the preexisting structure includes a wellbore casing. In an exemplary embodiment, the preexisting structure includes a pipeline. In an exemplary embodiment, the preexisting structure includes a structural support. In an exemplary embodiment, the method further includes compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member into contact with the interior surface of the preexisting structure. In an exemplary embodiment, the method further includes decompressing the resilient member within the interior of the expandable tubular member, positioning the resilient member to another location within the interior of the expandable tubular member, and compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform another portion of the expandable tubular member into contact with the interior surface of the preexisting structure. In an exemplary embodiment, the intermediate portion of the expandable tubular member positioned between the radially expanded and plastically deformed portions defines one or more radial openings for conveying fluidic materials between the interiors of the expandable tubular member and the preexisting structure. In an exemplary embodiment, the preexisting structure includes a wellbore that traverses a subterranean formation. In an exemplary embodiment, the subterranean formation includes a source of geothermal energy. In an exemplary embodiment, the subterranean formation includes a source of hydrocarbons. In an exemplary embodiment, the method further includes compressing the resilient member in the longitudinal direction within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member. In an exemplary embodiment, the resilient member is a resilient tubular member. In an exemplary embodiment, the expandable tubular member is a solid expandable tubular member. In an exemplary embodiment, the expandable tubular member defines one or more radial openings for conveying fluidic materials.

[0041] A system for radially expanding and plastically deforming at least a portion of an expandable tubular member has been described that includes means for positioning a resilient member within the interior of the expandable tubular member, and means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member. In an exemplary embodiment, the inside diameter of the radially expanded portion of the expandable tubular member is increased by up to

about 22 percent during the radial expansion and plastic deformation. In an exemplary embodiment, the system further includes means for positioning an adjustable expansion cone within the radially expanded and plastically deformed portion of the expandable tubular member, means for expanding the adjustable expansion cone within the radially expanded and plastically deformed portion of the expandable tubular member, and means for displacing the adjustable expansion cone relative to the expandable tubular member in the longitudinal direction to radially expand and plastically deform another portion of the expandable tubular member. In an exemplary embodiment, the system further includes means for decompressing the resilient member within the interior of the expandable tubular member, means for positioning the resilient member to another location within the interior of the expandable tubular member, and means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform another portion of the expandable tubular member. In an exemplary embodiment, the system further includes means for positioning the expandable tubular member within a preexisting structure. In an exemplary embodiment, the preexisting structure includes a wellbore. In an exemplary embodiment, the preexisting structure includes a wellbore casing. In an exemplary embodiment, the preexisting structure includes a pipeline. In an exemplary embodiment, the preexisting structure includes a structural support. In an exemplary embodiment, the system further includes means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member into contact with the interior surface of the preexisting structure. In an exemplary embodiment, the system further includes means for decompressing the resilient member within the interior of the expandable tubular member, means for positioning the resilient member to another location within the interior of the expandable tubular member, and means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform another portion of the expandable tubular member into contact with the interior surface of the preexisting structure. In an exemplary embodiment, an intermediate portion of the expandable tubular member positioned between the radially expanded and plastically deformed portions defines one or more radial openings for conveying fluidic materials between the interiors of the expandable tubular member and the preexisting structure. In an exemplary embodiment, the preexisting structure includes a wellbore that traverses a subterranean formation. In an exemplary embodiment, the subterranean formation includes a source of geothermal energy. In an exemplary embodiment, the subterranean formation includes a source of hydrocarbons. In an exemplary embodiment, the system further includes means for compressing the resilient member in the longitudinal direction within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member. In an exemplary embodiment, the resilient member includes a resilient tubular member. In an exemplary embodiment, the expandable tubular member is a solid expandable tubular

member. In an exemplary embodiment, the expandable tubular member defines one or more radial openings for conveying fluidic materials.

[0042] An apparatus for radially expanding and plastically deforming an expandable tubular member has been described that includes a support member, a resilient member coupled to the support member, and an actuator operably coupled to the resilient member for controllably compressing the resilient member to thereby radially expand and plastically deform the expandable tubular member. In an exemplary embodiment, the resilient member includes a tubular resilient member. In an exemplary embodiment, the apparatus further includes an adjustable expansion cone coupled to the support member. In an exemplary embodiment, the actuator is adapted to compress the resilient member in the longitudinal direction and thereby cause the resilient member to expand in the radial direction. In an exemplary embodiment, the support member is fabricated from a rigid material. In an exemplary embodiment, the rigid material is selected from the group consisting of steel and aluminum. In an exemplary embodiment, the resilient member is fabricated from materials selected from the group consisting of natural rubber, synthetic rubber, and elastomeric material.

[0043] It is understood that variations may be made in the foregoing without departing from the scope of the invention. For example, the teachings of the present illustrative embodiments may be used to provide a wellbore casing, a pipeline, or a structural support. Furthermore, the elements and teachings of the various illustrative embodiments may be combined in whole or in part in some or all of the illustrative embodiments.

[0044] Although illustrative embodiments of the invention have been shown and described, a wide range of modification, changes and substitution is contemplated in the foregoing disclosure. In some instances, some features of the present invention may be employed without a corresponding use of the other features. Accordingly, it is appropriate that the appended claims be construed broadly and in a manner consistent with the scope of the invention.

Claims

1. A method of radially expanding and plastically deforming at least a portion of an expandable tubular member, comprising:
positioning a resilient member within the interior of the expandable tubular member; and
compressing the resilient member within the interior of the expandable tubular member to
radially expand and plastically deform a portion of the expandable tubular member.
2. The method of claim 1, wherein the inside diameter of the radially expanded portion of the expandable tubular member is increased by up to about 22 percent during the radial expansion and plastic deformation.
3. The method of claim 1, further comprising:
positioning an adjustable expansion cone within the radially expanded and plastically deformed portion of the expandable tubular member;
expanding the adjustable expansion cone within the radially expanded and plastically deformed portion of the expandable tubular member; and
displacing the adjustable expansion cone relative to the expandable tubular member in the longitudinal direction to radially expand and plastically deform another portion of the expandable tubular member.
4. The method of claim 1, further comprising:
decompressing the resilient member within the interior of the expandable tubular member;
positioning the resilient member to another location within the interior of the expandable tubular member; and
compressing the resilient member within the interior of the expandable tubular member to
radially expand and plastically deform another portion of the expandable tubular member.
5. The method of claim 1, further comprising:
positioning the expandable tubular member within a preexisting structure.
6. The method of claim 5, wherein the preexisting structure comprises a wellbore.
7. The method of claim 5, wherein the preexisting structure comprises a wellbore casing.
8. The method of claim 5, wherein the preexisting structure comprises a pipeline.

9. The method of claim 5, wherein the preexisting structure comprises a structural support.
10. The method of claim 5, further comprising:
compressing the resilient member within the interior of the expandable tubular member to
radially expand and plastically deform a portion of the expandable tubular member
into contact with the interior surface of the preexisting structure.
11. The method of claim 10, further comprising:
decompressing the resilient member within the interior of the expandable tubular member;
positioning the resilient member to another location within the interior of the expandable
tubular member; and
compressing the resilient member within the interior of the expandable tubular member to
radially expand and plastically deform another portion of the expandable tubular
member into contact with the interior surface of the preexisting structure.
12. The method of claim 11, wherein an intermediate portion of the expandable tubular member
positioned between the radially expanded and plastically deformed portions defines one or more radial
openings for conveying fluidic materials between the interiors of the expandable tubular member and
the preexisting structure.
13. The method of claim 12, wherein the preexisting structure comprises a wellbore that traverses
a subterranean formation.
14. The method of claim 13, wherein the subterranean formation comprises a source of
geothermal energy.
15. The method of claim 13, wherein the subterranean formation comprises a source of
hydrocarbons.
16. The method of claim 1, further comprising:
compressing the resilient member in the longitudinal direction within the interior of the
expandable tubular member to radially expand and plastically deform a portion of the
expandable tubular member.
17. The method of claim 1, wherein the resilient member comprises a resilient tubular member.

18. The method of claim 1, wherein the expandable tubular member comprises a solid expandable tubular member.
19. The method of claim 1, wherein the expandable tubular member defines one or more radial openings for conveying fluidic materials.
20. A system for radially expanding and plastically deforming at least a portion of an expandable tubular member, comprising:
means for positioning a resilient member within the interior of the expandable tubular member; and
means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member.
21. The system of claim 20, wherein the inside diameter of the radially expanded portion of the expandable tubular member is increased by up to about 22 percent during the radial expansion and plastic deformation.
22. The system of claim 20, further comprising:
means for positioning an adjustable expansion cone within the radially expanded and plastically deformed portion of the expandable tubular member;
means for expanding the adjustable expansion cone within the radially expanded and plastically deformed portion of the expandable tubular member; and
means for displacing the adjustable expansion cone relative to the expandable tubular member in the longitudinal direction to radially expand and plastically deform another portion of the expandable tubular member.
23. The system of claim 20, further comprising:
means for decompressing the resilient member within the interior of the expandable tubular member;
means for positioning the resilient member to another location within the interior of the expandable tubular member; and
means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform another portion of the expandable tubular member.
24. The system of claim 20, further comprising:

means for positioning the expandable tubular member within a preexisting structure.

25. The system of claim 24, wherein the preexisting structure comprises a wellbore.
26. The system of claim 24, wherein the preexisting structure comprises a wellbore casing.
27. The system of claim 24, wherein the preexisting structure comprises a pipeline.
28. The system of claim 24, wherein the preexisting structure comprises a structural support.
29. The system of claim 24, further comprising:
means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member into contact with the interior surface of the preexisting structure.
30. The system of claim 29, further comprising:
means for decompressing the resilient member within the interior of the expandable tubular member;
means for positioning the resilient member to another location within the interior of the expandable tubular member; and
means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform another portion of the expandable tubular member into contact with the interior surface of the preexisting structure.
31. The system of claim 30, wherein an intermediate portion of the expandable tubular member positioned between the radially expanded and plastically deformed portions defines one or more radial openings for conveying fluidic materials between the interiors of the expandable tubular member and the preexisting structure.
32. The system of claim 31, wherein the preexisting structure comprises a wellbore that traverses a subterranean formation.
33. The system of claim 32, wherein the subterranean formation comprises a source of geothermal energy.
34. The system of claim 32, wherein the subterranean formation comprises a source of hydrocarbons.

35. The system of claim 20, further comprising:
means for compressing the resilient member in the longitudinal direction within the interior of
the expandable tubular member to radially expand and plastically deform a portion of
the expandable tubular member.
36. The system of claim 20, wherein the resilient member comprises a resilient tubular member.
37. The system of claim 20, wherein the expandable tubular member comprises a solid
expandable tubular member.
38. The system of claim 20, wherein the expandable tubular member defines one or more radial
openings for conveying fluidic materials.
39. An apparatus for radially expanding and plastically deforming an expandable tubular member,
comprising:
a support member;
a resilient member coupled to the support member; and
an actuator operably coupled to the resilient member for controllably compressing the
resilient member to thereby radially expand and plastically deform the expandable
tubular member.
40. The apparatus of claim 39, wherein the resilient member comprises a tubular resilient
member.
41. The apparatus of claim 39, further comprising an adjustable expansion cone coupled to the
support member.
42. The apparatus of claim 39, wherein the actuator is adapted to compress the resilient member
in the longitudinal direction and thereby cause the resilient member to expand in the radial direction.
43. The apparatus of claim 39, wherein the support member is fabricated from a rigid material.
44. The apparatus of claim 43, wherein the rigid material is selected from the group consisting of
steel and aluminum.
45. The apparatus of claim 39, wherein the resilient member is fabricated from materials selected
from the group consisting of natural rubber, synthetic rubber, and elastomeric material.

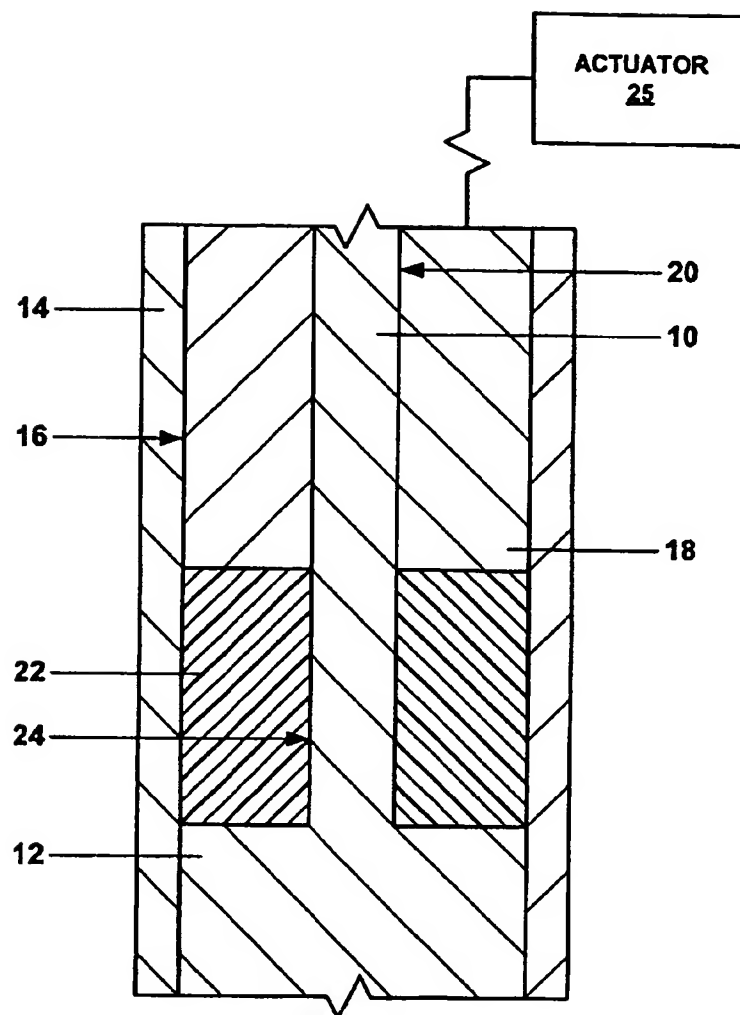


Fig. 1a

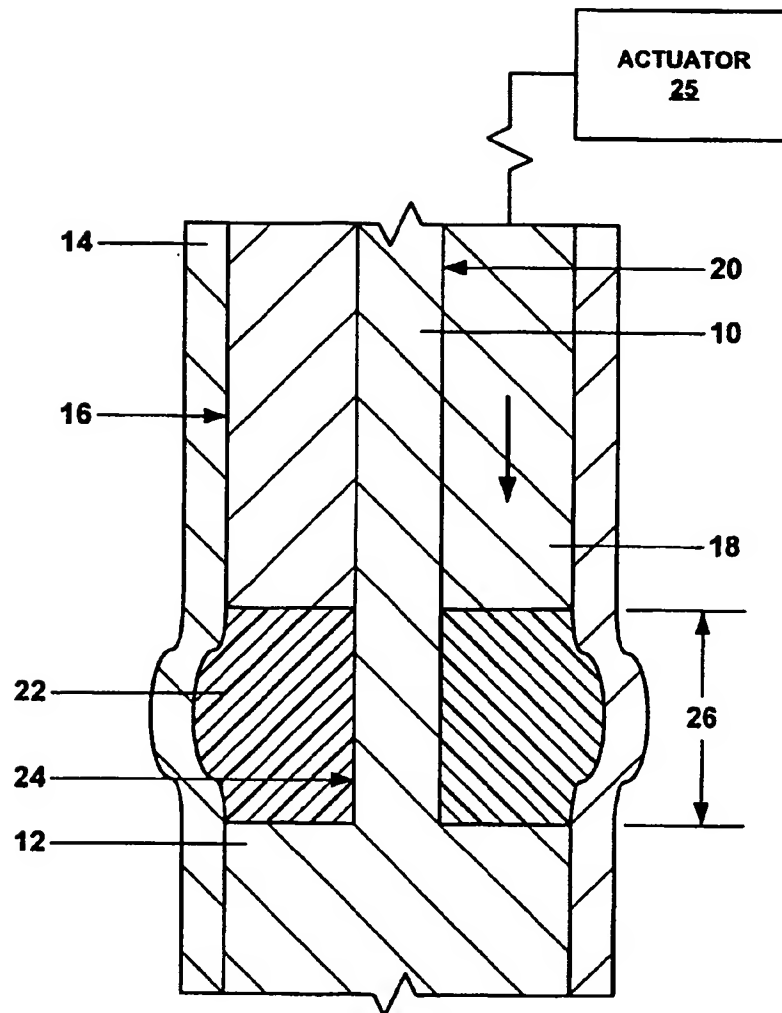


Fig. 1b

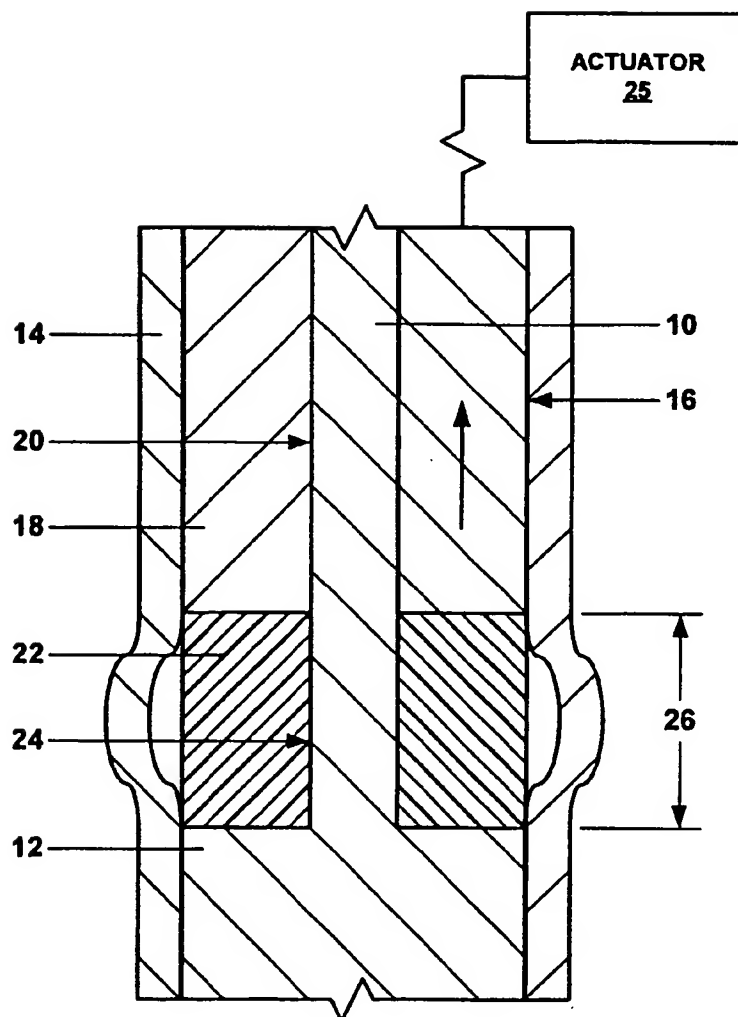


Fig. 1c

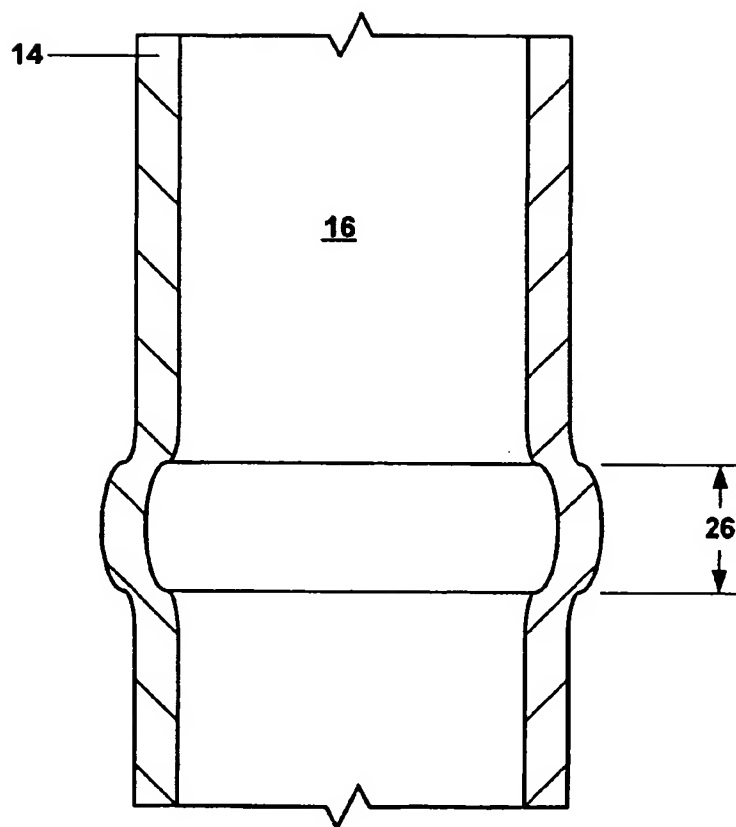


Fig. 1d

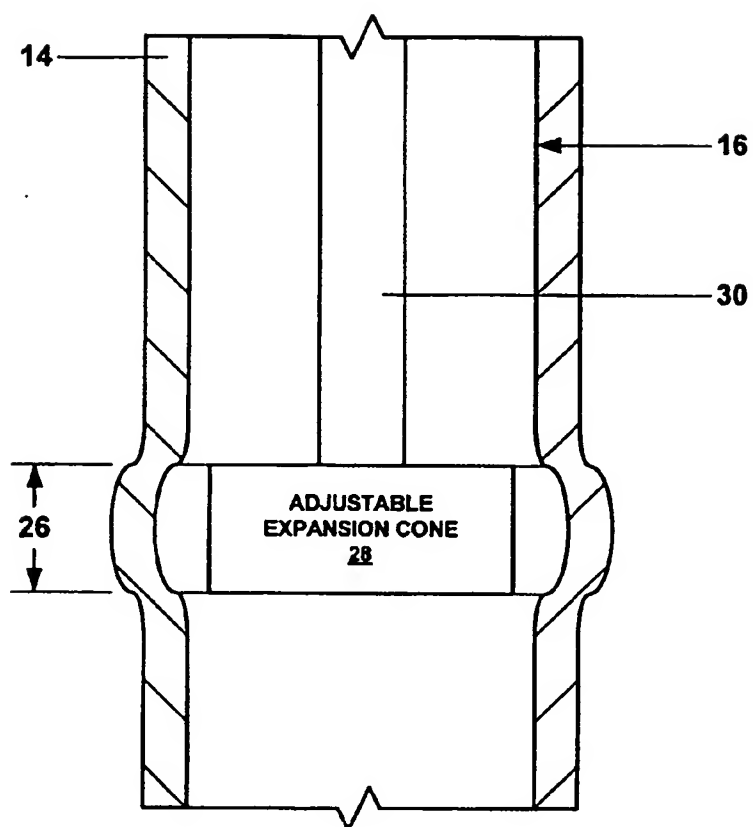


Fig. 1e

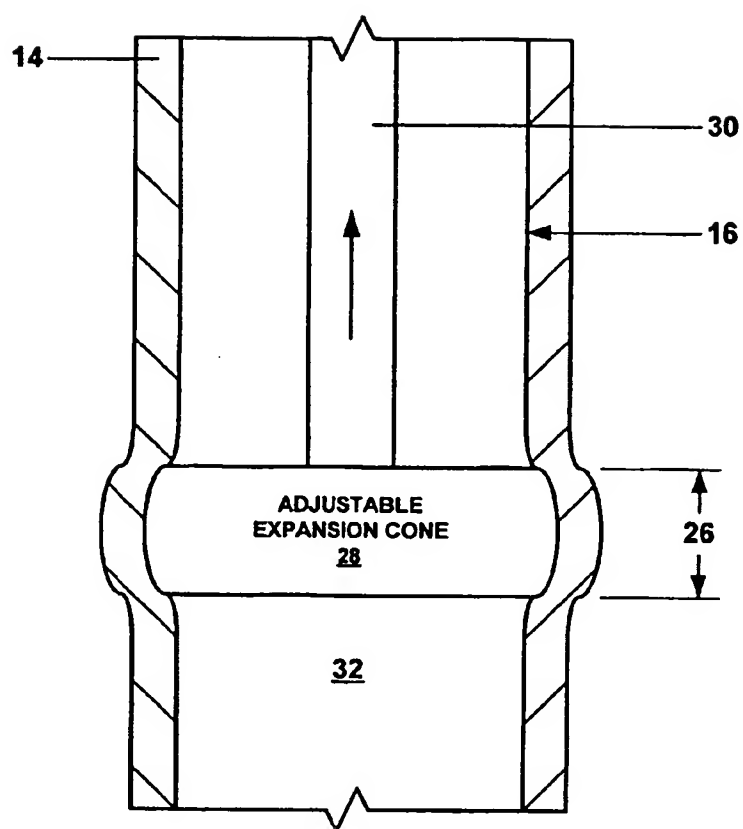


Fig. 1f

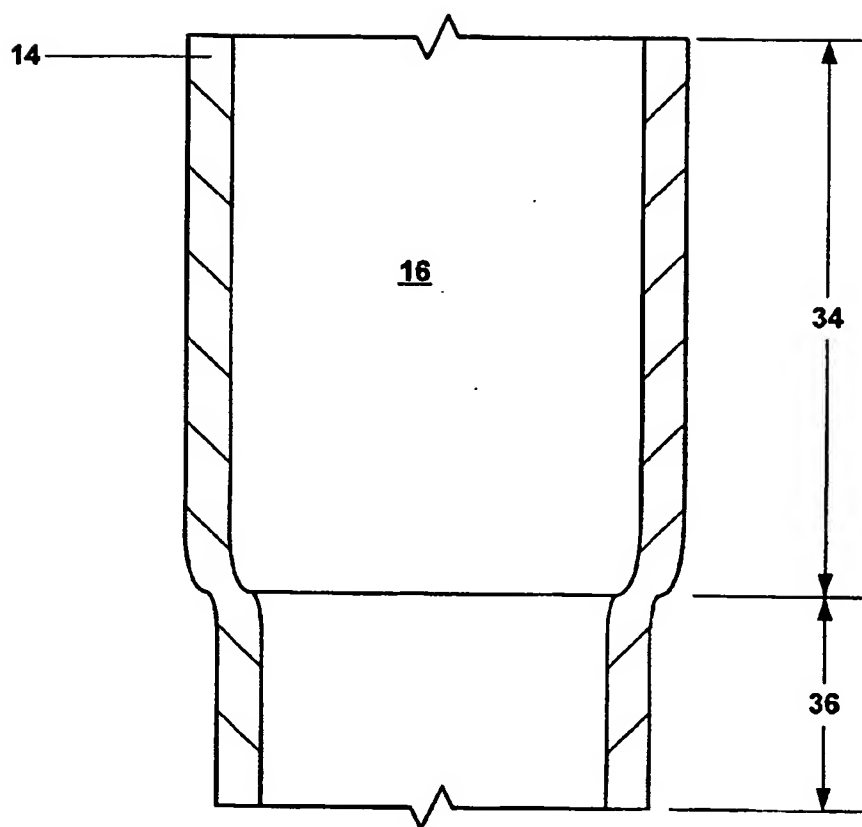


Fig. 1g

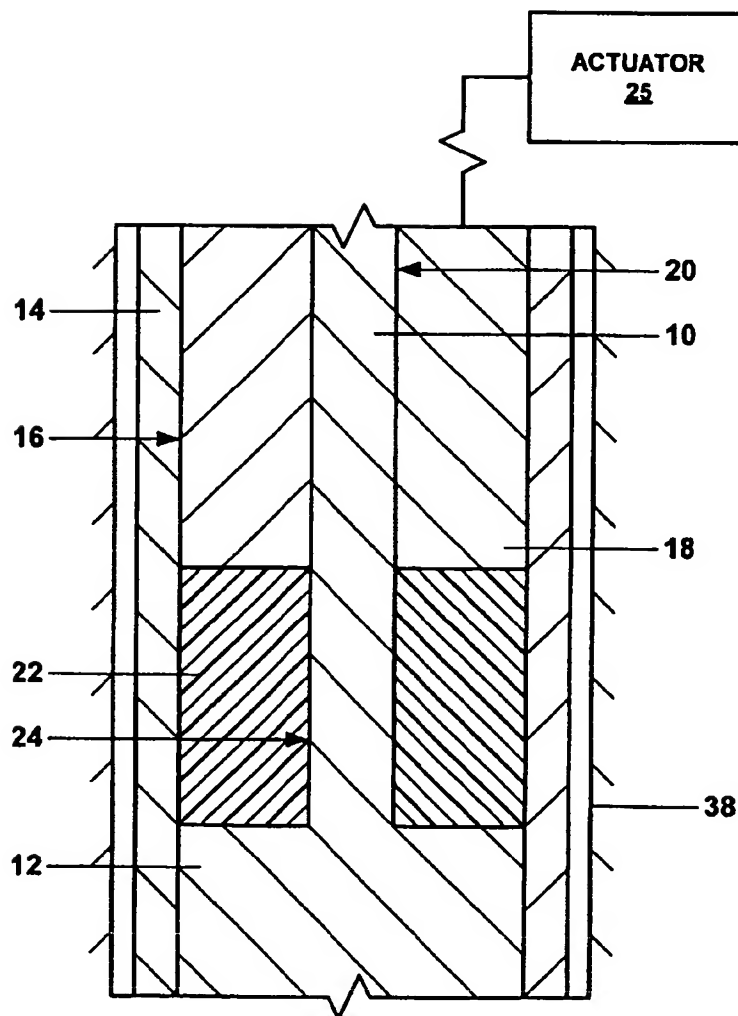


Fig. 2a

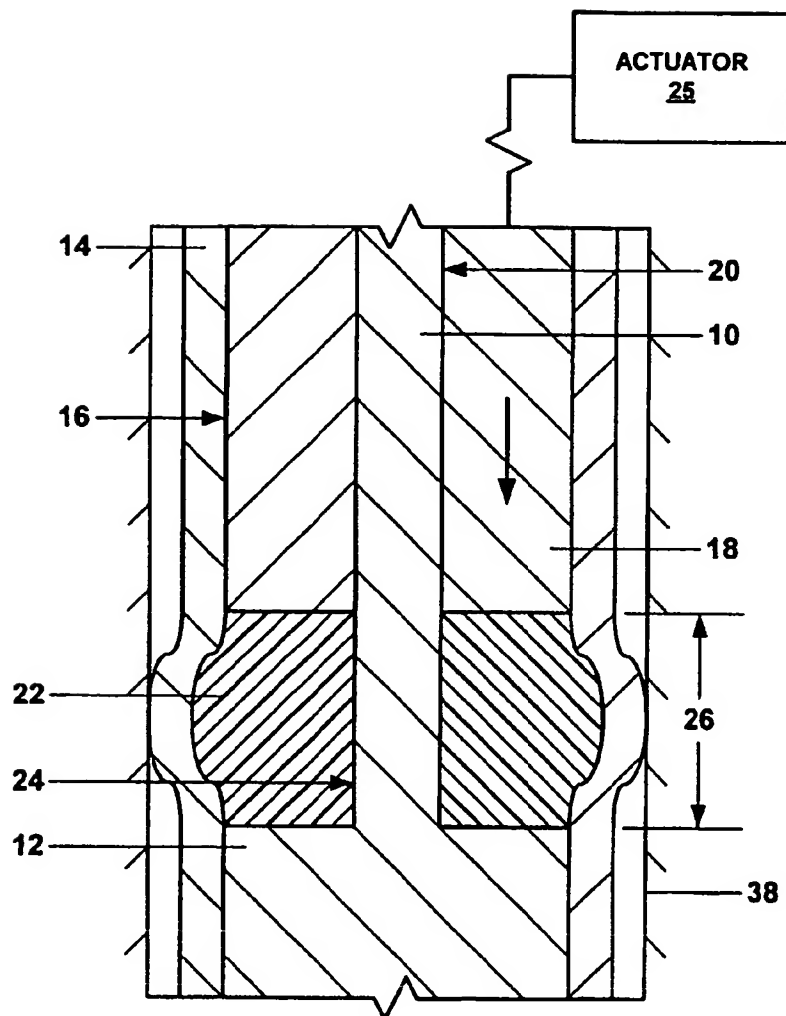


Fig. 2b

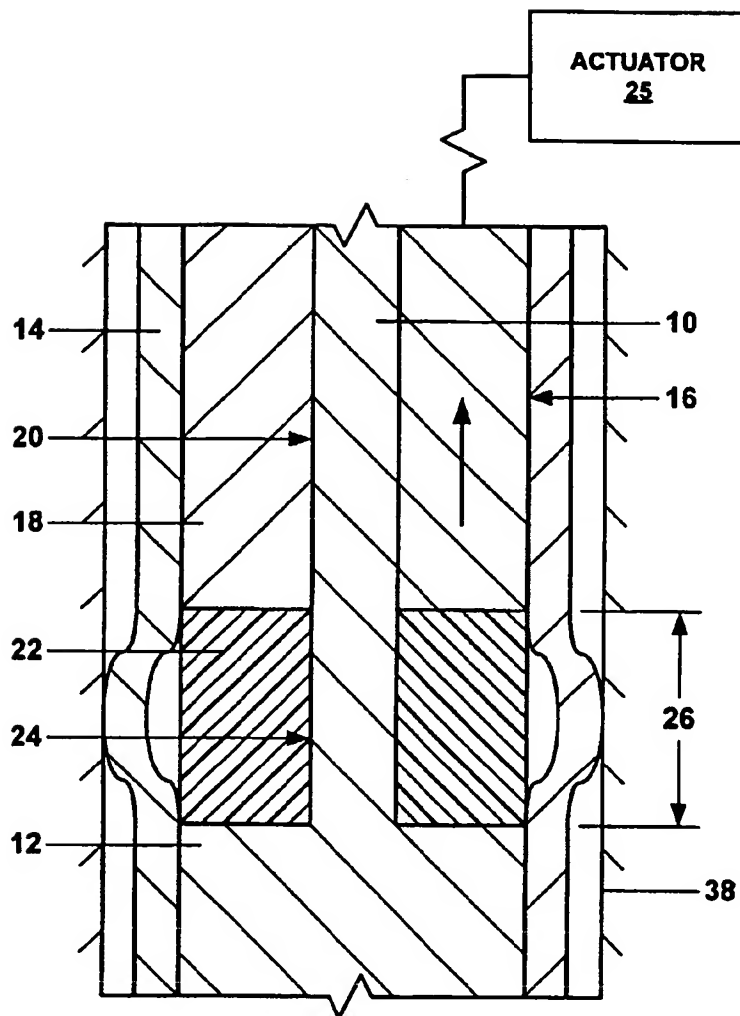


Fig. 2c

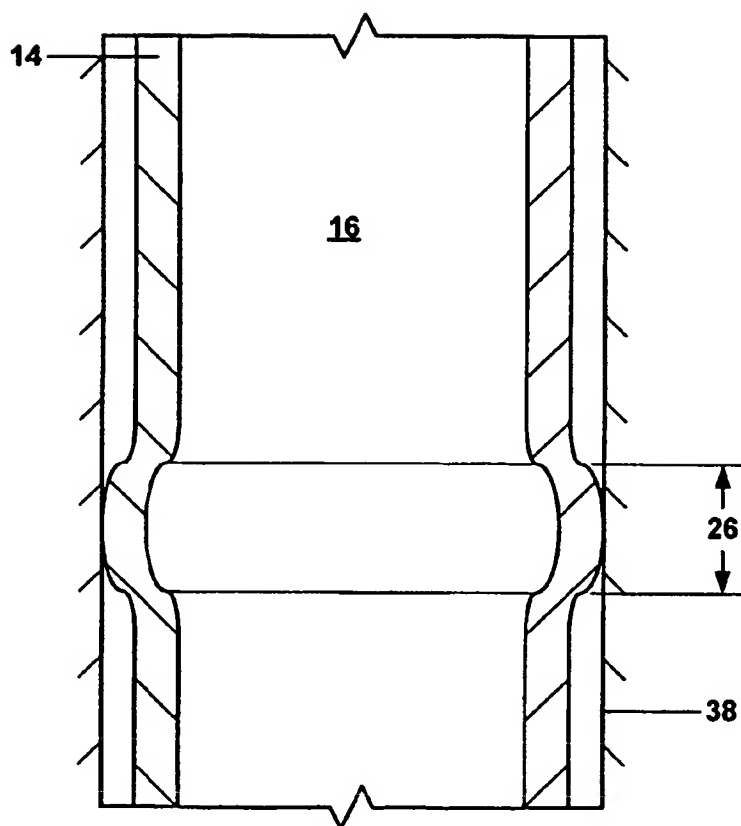


Fig. 2d

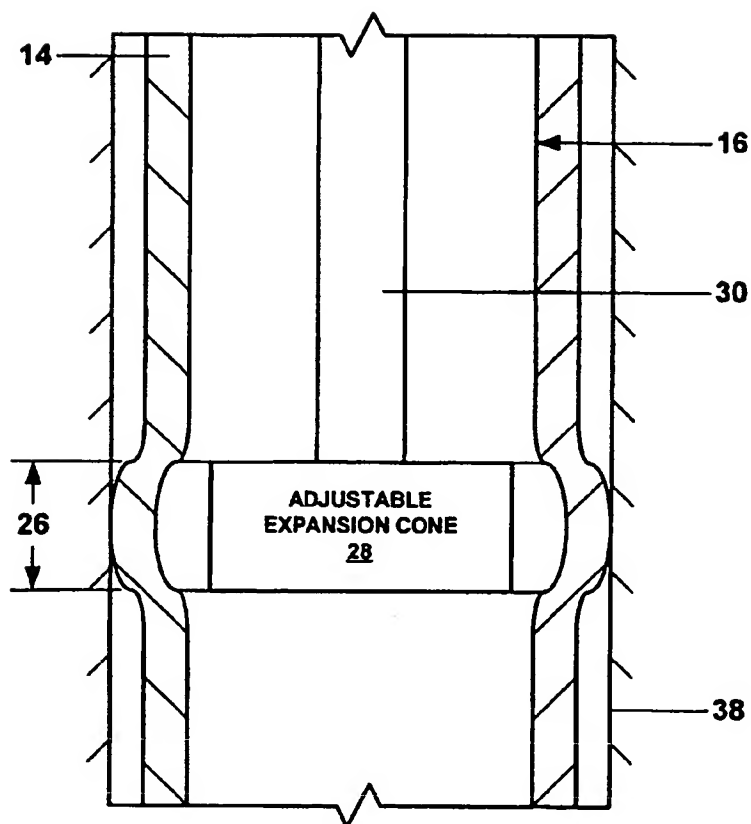


Fig. 2e

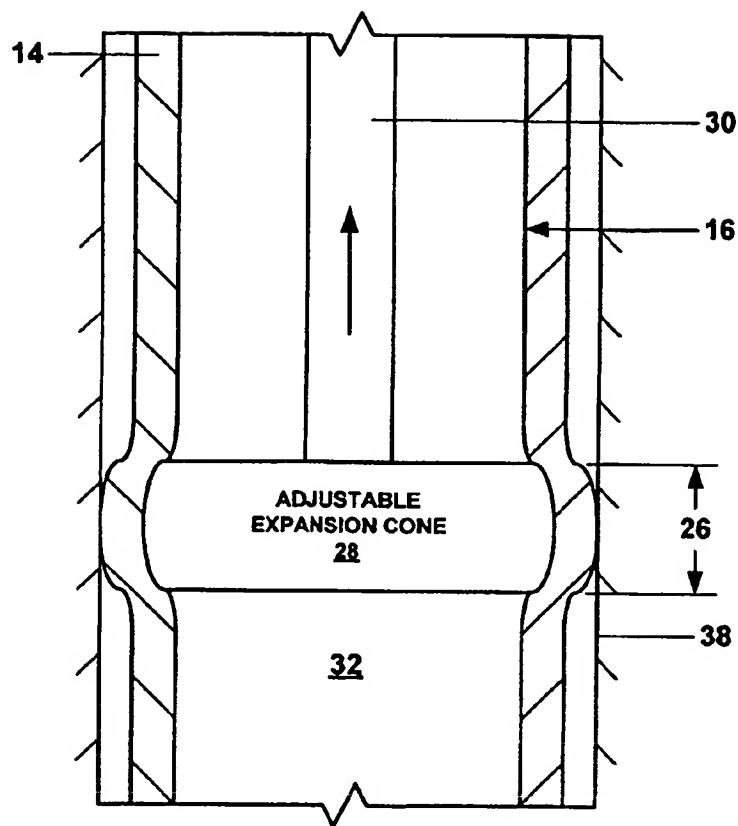


Fig. 2f

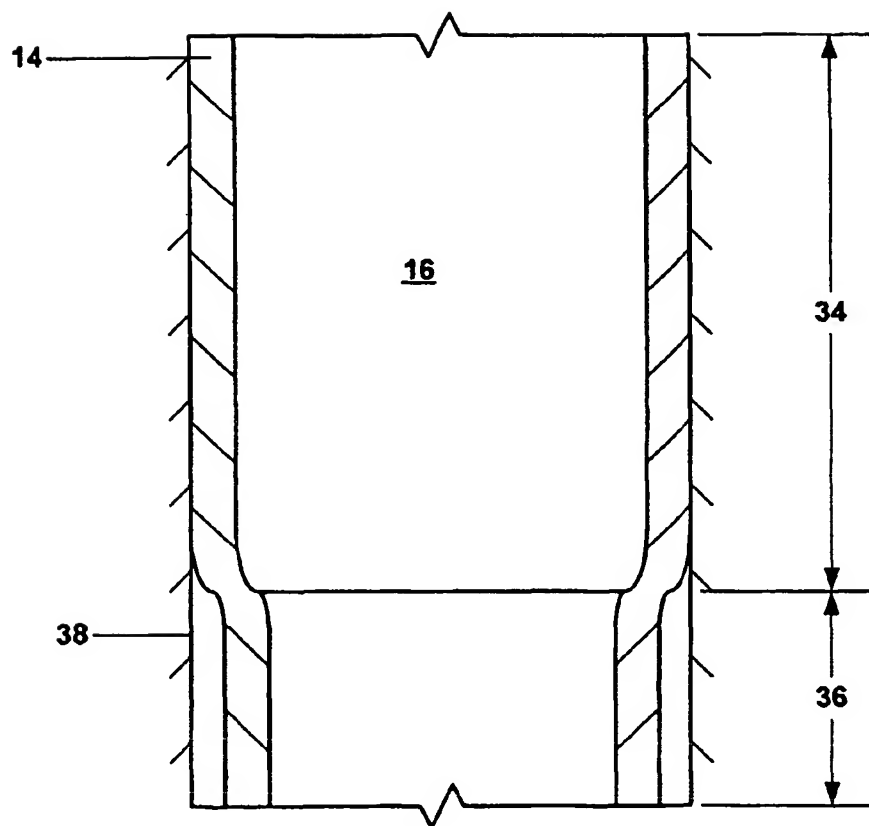


Fig. 2g

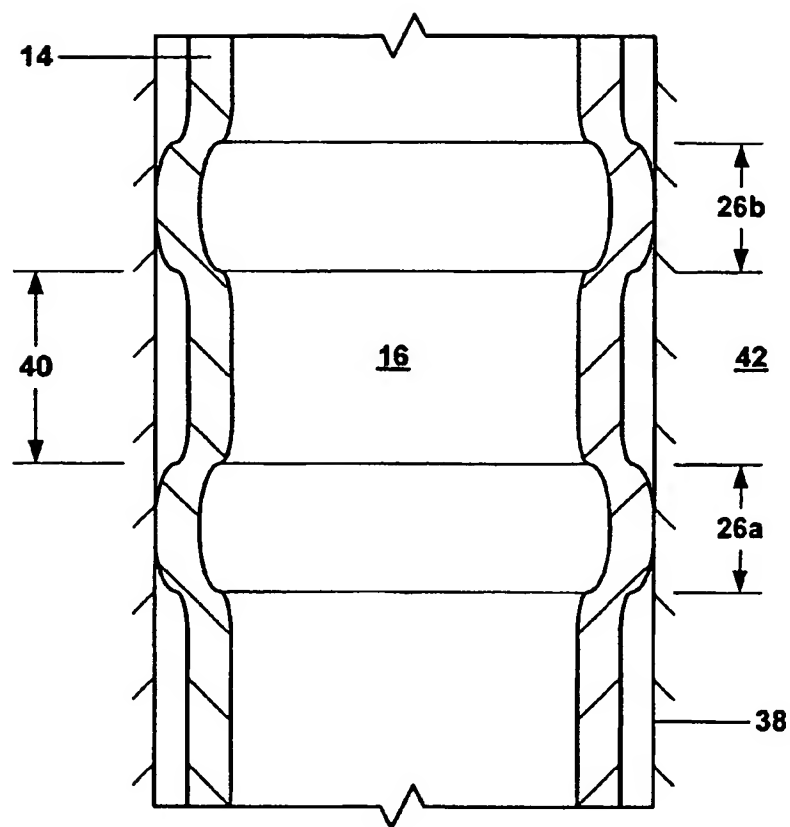


Fig. 3

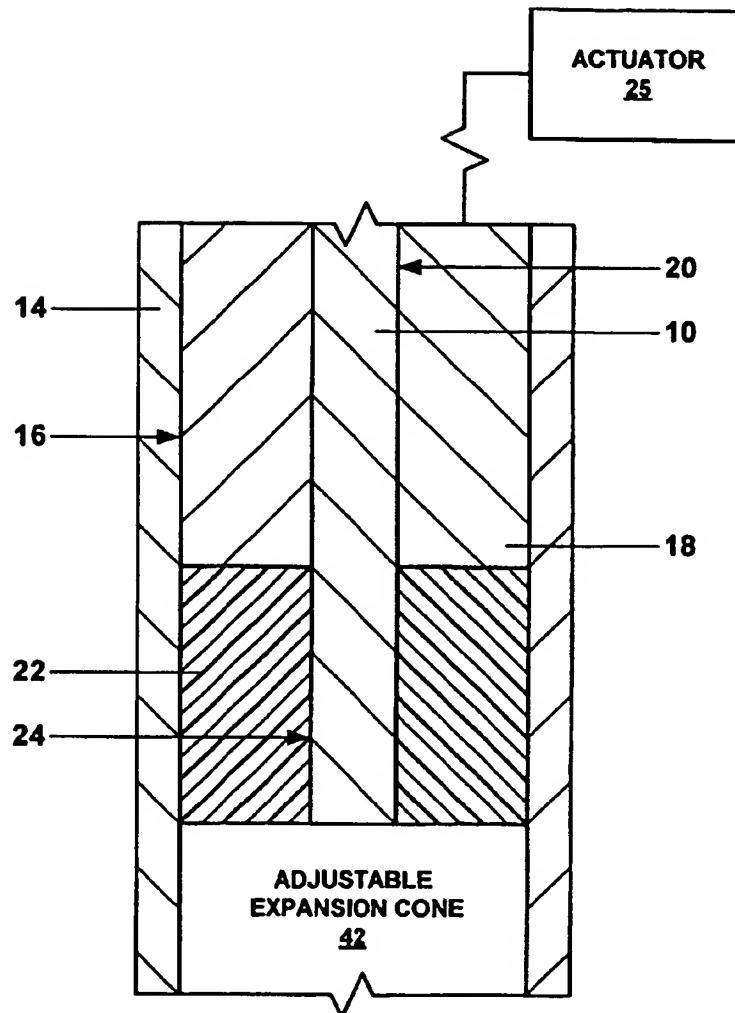


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/11765

A. CLASSIFICATION OF SUBJECT MATTER IPC(7) : E21B 43/10 US CL : 166/207,206 According to International Patent Classification (IPC) or to both national classification and IPC														
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 166/207,206,217,382; 285/382.4,382.5 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)														
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1"> <thead> <tr> <th>Category *</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>X</td> <td>US 4,871,199 A (Ridenour et al.) 3 October 1989 (03.12.1989), Figure 5, col. 5, lines 46-65.</td> <td>1-2, 16-18, 20-21, 35-37, 39-40, 42-45</td> </tr> <tr> <td>X</td> <td>US 4,581,817 A (Kelly) 15 April 1986 (15.04.1986), Entire document, Figures 2-3.</td> <td>1-2, 5, 9-10, 16-18, 20-21, 24, 28-29, 35-37, 39-40, 42-45</td> </tr> <tr> <td>X --- Y</td> <td>US 4,422,317 A (Mueller) 27 December 1983 (27.12.1983), Figures 1-2, col. 1, lines 39-54)</td> <td>1-2, 4, 16-18, 20-21, 23, 35-37, 39-40, 42-45 ----- 5, 10-15, 19, 24, 28-34, 38</td> </tr> </tbody> </table>			Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	X	US 4,871,199 A (Ridenour et al.) 3 October 1989 (03.12.1989), Figure 5, col. 5, lines 46-65.	1-2, 16-18, 20-21, 35-37, 39-40, 42-45	X	US 4,581,817 A (Kelly) 15 April 1986 (15.04.1986), Entire document, Figures 2-3.	1-2, 5, 9-10, 16-18, 20-21, 24, 28-29, 35-37, 39-40, 42-45	X --- Y	US 4,422,317 A (Mueller) 27 December 1983 (27.12.1983), Figures 1-2, col. 1, lines 39-54)	1-2, 4, 16-18, 20-21, 23, 35-37, 39-40, 42-45 ----- 5, 10-15, 19, 24, 28-34, 38
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.												
X	US 4,871,199 A (Ridenour et al.) 3 October 1989 (03.12.1989), Figure 5, col. 5, lines 46-65.	1-2, 16-18, 20-21, 35-37, 39-40, 42-45												
X	US 4,581,817 A (Kelly) 15 April 1986 (15.04.1986), Entire document, Figures 2-3.	1-2, 5, 9-10, 16-18, 20-21, 24, 28-29, 35-37, 39-40, 42-45												
X --- Y	US 4,422,317 A (Mueller) 27 December 1983 (27.12.1983), Figures 1-2, col. 1, lines 39-54)	1-2, 4, 16-18, 20-21, 23, 35-37, 39-40, 42-45 ----- 5, 10-15, 19, 24, 28-34, 38												
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.														
<table border="0"> <tr> <td> * Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family </td> </tr> </table>			* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family										
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family													
Date of the actual completion of the international search 26 September 2003 (26.09.2003)		Date of mailing of the international search report 13 NOV 2003												
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US Commissioner for Patents P.O. Box 1450 Alexandria, Virginia 22313-1450 Facsimile No. (703)305-3230		Authorized officer Lynne H. Browne Telephone No. 703-308-1113												

Form PCT/ISA/210 (second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT

PCT/US03/11765

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 4,388,752 A (Vinciguerra et al.) 21 June 1983 (21.06.1983) Entire Document, Figures 1-2.	1-2, 5, 8-10, 16-18, 20-21, 24, 27-29, 35-37, 39-40, 42-45 ----- 6-7, 19, 25-26, 38
Y	US 6,6070,671 A (Cumming et al.) 6 June 2000 (06.06.2000), Figures 1 and 4.	5-7, and 24-26
Y	US 3,353,599 A (Swift) 21 November 1967 (21.11.1967) Figures 3-4	12-15, 19, 31-34, 38

**(19) World Intellectual Property
Organization
International Bureau**



(43) International Publication Date
11 December 2003 (11.12.2003)

PCT

(10) International Publication Number
WO 2003/102365 A1

(51) International Patent Classification⁷: E21B 43/10

(21) International Application Number:
PCT/US2003/011765

(22) International Filing Date: 17 April 2003 (17.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/383,917 29 May 2002 (29.05.2002) US

(71) Applicant (for all designated States except US): EVENTURE GLOBAL TECHNOLOGY [US/US]; 16200 A Park Row, Houston, TX 77084 (US).

(72) Inventor; and

(75) **Inventor/Applicant (for US only):** RING, Lev [US/US];
14220 Heatherhill Place, Houston, TX 77077 (US).


(74) Agents: MATTINGLY, Todd et al.; Haynes and Boone, LLP, 1000 Louisiana Street, Suite 4300, Houston, TX 77002-5012 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GI, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SYSTEM FOR RADIALY EXPANDING A TUBULAR MEMBER

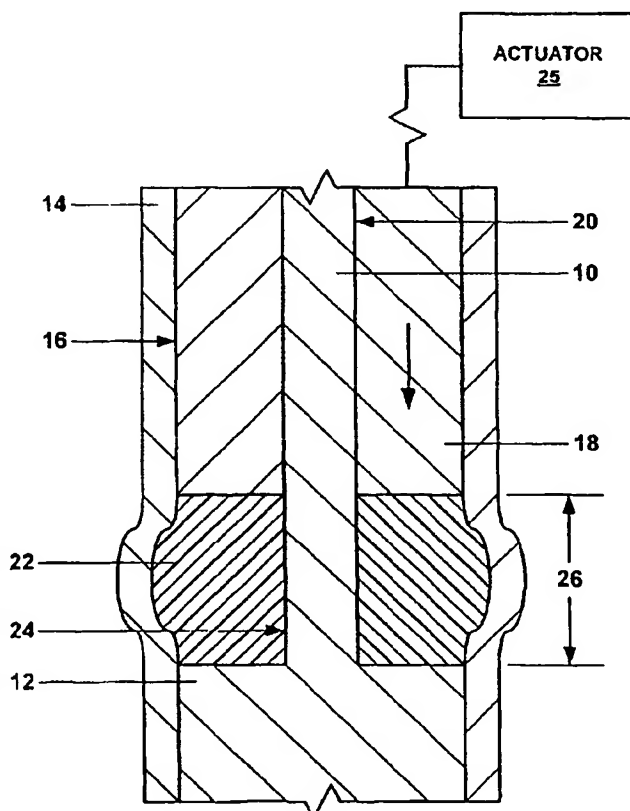

(57) Abstract: A system for radially expanding a tubular member (14).

WO 2003/102365 A1

Date of publication of the amended claims: 18 March 2004

- Date of publication of the amended claims:** 18 March 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

- with international search report
- with amended claims

AMENDED CLAIMS

[received by the International Bureau on 12 January 2004 (12.01.04);
original claims 1, 20, 39 amended; claims 46-93 added; remaining claims unchanged]

1. A method of radially expanding and plastically deforming at least a portion of an expandable tubular member, comprising:

positioning a resilient member within the interior of the expandable tubular member;
compressing the resilient member within the interior of the expandable tubular member to
radially expand and plastically deform a portion of the expandable tubular member;
and

positioning an adjustable expansion device within the radially expanded and plastically
deformed portion of the expandable tubular member;

expanding the adjustable expansion device within the radially expanded and plastically
deformed portion of the expandable tubular member; and

displacing the adjustable expansion device relative to the expandable tubular member in the
longitudinal direction to radially expand and plastically deform another portion of the
expandable tubular member.

2. The method of claim 1, wherein the inside diameter of the radially expanded portion of the
expandable tubular member is increased by up to about 22 percent during the radial expansion and
plastic deformation.

3. The method of claim 1, further comprising:

positioning an adjustable expansion cone within the radially expanded and plastically
deformed portion of the expandable tubular member;

expanding the adjustable expansion cone within the radially expanded and plastically
deformed portion of the expandable tubular member; and

displacing the adjustable expansion cone relative to the expandable tubular member in the
longitudinal direction to radially expand and plastically deform another portion of the
expandable tubular member.

4. The method of claim 1, further comprising:

decompressing the resilient member within the interior of the expandable tubular member;
positioning the resilient member to another location within the interior of the expandable
tubular member; and

compressing the resilient member within the interior of the expandable tubular member to
radially expand and plastically deform another portion of the expandable tubular
member.

5. The method of claim 1, further comprising:
positioning the expandable tubular member within a preexisting structure.
6. The method of claim 5, wherein the preexisting structure comprises a wellbore.
7. The method of claim 5, wherein the preexisting structure comprises a wellbore casing.
8. The method of claim 5, wherein the preexisting structure comprises a pipeline.
9. The method of claim 5, wherein the preexisting structure comprises a structural support.
10. The method of claim 5, further comprising:
compressing the resilient member within the interior of the expandable tubular member to
radially expand and plastically deform a portion of the expandable tubular member
into contact with the interior surface of the preexisting structure.
11. The method of claim 10, further comprising:
decompressing the resilient member within the interior of the expandable tubular member;
positioning the resilient member to another location within the interior of the expandable
tubular member; and
compressing the resilient member within the interior of the expandable tubular member to
radially expand and plastically deform another portion of the expandable tubular
member into contact with the interior surface of the preexisting structure.
12. The method of claim 11, wherein an intermediate portion of the expandable tubular member
positioned between the radially expanded and plastically deformed portions defines one or more radial
openings for conveying fluidic materials between the interiors of the expandable tubular member and
the preexisting structure.
13. The method of claim 12, wherein the preexisting structure comprises a wellbore that traverses
a subterranean formation.
14. The method of claim 13, wherein the subterranean formation comprises a source of
geothermal energy.
15. The method of claim 13, wherein the subterranean formation comprises a source of
hydrocarbons.

16. The method of claim 1, further comprising:
compressing the resilient member in the longitudinal direction within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member.
17. The method of claim 1, wherein the resilient member comprises a resilient tubular member.
18. The method of claim 1, wherein the expandable tubular member comprises a solid expandable tubular member.
19. The method of claim 1, wherein the expandable tubular member defines one or more radial openings for conveying fluidic materials.
20. A system for radially expanding and plastically deforming at least a portion of an expandable tubular member, comprising:
means for positioning a resilient member within the interior of the expandable tubular member;
means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member; and
means for positioning an adjustable expansion device within the radially expanded and plastically deformed portion of the expandable tubular member;
means for expanding the adjustable expansion device within the radially expanded and plastically deformed portion of the expandable tubular member; and
means for displacing the adjustable expansion device relative to the expandable tubular member in the longitudinal direction to radially expand and plastically deform another portion of the expandable tubular member.
21. The system of claim 20, wherein the inside diameter of the radially expanded portion of the expandable tubular member is increased by up to about 22 percent during the radial expansion and plastic deformation.
22. The system of claim 20, further comprising:
means for positioning an adjustable expansion cone within the radially expanded and plastically deformed portion of the expandable tubular member;
means for expanding the adjustable expansion cone within the radially expanded and plastically deformed portion of the expandable tubular member; and

means for displacing the adjustable expansion cone relative to the expandable tubular member in the longitudinal direction to radially expand and plastically deform another portion of the expandable tubular member.

23. The system of claim 20, further comprising:
means for decompressing the resilient member within the interior of the expandable tubular member;
means for positioning the resilient member to another location within the interior of the expandable tubular member; and
means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform another portion of the expandable tubular member.
24. The system of claim 20, further comprising:
means for positioning the expandable tubular member within a preexisting structure.
25. The system of claim 24, wherein the preexisting structure comprises a wellbore.
26. The system of claim 24, wherein the preexisting structure comprises a wellbore casing.
27. The system of claim 24, wherein the preexisting structure comprises a pipeline.
28. The system of claim 24, wherein the preexisting structure comprises a structural support.
29. The system of claim 24, further comprising:
means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member into contact with the interior surface of the preexisting structure.
30. The system of claim 29, further comprising:
means for decompressing the resilient member within the interior of the expandable tubular member;
means for positioning the resilient member to another location within the interior of the expandable tubular member; and
means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform another portion of the expandable tubular member into contact with the interior surface of the preexisting structure.

31. The system of claim 30, wherein an intermediate portion of the expandable tubular member positioned between the radially expanded and plastically deformed portions defines one or more radial openings for conveying fluidic materials between the interiors of the expandable tubular member and the preexisting structure.
32. The system of claim 31, wherein the preexisting structure comprises a wellbore that traverses a subterranean formation.
33. The system of claim 32, wherein the subterranean formation comprises a source of geothermal energy.
34. The system of claim 32, wherein the subterranean formation comprises a source of hydrocarbons.
35. The system of claim 20, further comprising:
means for compressing the resilient member in the longitudinal direction within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member.
36. The system of claim 20, wherein the resilient member comprises a resilient tubular member.
37. The system of claim 20, wherein the expandable tubular member comprises a solid expandable tubular member.
38. The system of claim 20, wherein the expandable tubular member defines one or more radial openings for conveying fluidic materials.
39. An apparatus for radially expanding and plastically deforming an expandable tubular member, comprising:
a support member;
a resilient member coupled to the support member;
an actuator operably coupled to the resilient member for controllably compressing the resilient member to thereby radially expand and plastically deform the expandable tubular member; and
an adjustable expansion device coupled to the support member.

40. The apparatus of claim 39, wherein the resilient member comprises a tubular resilient member.
41. The apparatus of claim 39, further comprising an adjustable expansion cone coupled to the support member.
42. The apparatus of claim 39, wherein the actuator is adapted to compress the resilient member in the longitudinal direction and thereby cause the resilient member to expand in the radial direction.
43. The apparatus of claim 39, wherein the support member is fabricated from a rigid material.
44. The apparatus of claim 43, wherein the rigid material is selected from the group consisting of steel and aluminum.
45. The apparatus of claim 39, wherein the resilient member is fabricated from materials selected from the group consisting of natural rubber, synthetic rubber, and elastomeric material.
46. A method of radially expanding and plastically deforming at least a portion of an expandable tubular member, comprising:
 positioning a resilient member within the interior of the expandable tubular member;
 compressing the resilient member within the interior of the expandable tubular member to
 radially expand and plastically deform a portion of the expandable tubular member;
 positioning an expansion device within the radially expanded and plastically deformed
 portion of the expandable tubular member; and
 operating the expansion device to radially expand and plastically deform another portion of
 the expandable tubular member.
47. The method of claim 46, wherein the expansion device comprises an adjustable expansion device.
48. The method of claim 46, wherein the expansion device comprises a rotary expansion device.
49. The method of claim 46, wherein the expansion device comprises a pressurization device.
50. A system for radially expanding and plastically deforming at least a portion of an expandable tubular member, comprising:
 means for positioning a resilient member within the interior of the expandable tubular
 member;

means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member;

means for positioning an expansion device within the radially expanded and plastically deformed portion of the expandable tubular member; and

means for operating the expansion device to radially expand and plastically deform another portion of the expandable tubular member.

51. The system of claim 50, wherein the expansion device comprises an adjustable expansion device.

52. The system of claim 50, wherein the expansion device comprises a rotary expansion device.

53. The system of claim 50, wherein the expansion device comprises a pressurization device.

54. An apparatus for radially expanding and plastically deforming an expandable tubular member, comprising:

a support member;

a resilient member coupled to the support member;

an actuator operably coupled to the resilient member for controllably compressing the resilient member to thereby radially expand and plastically deform the expandable tubular member; and

an expansion device coupled to the support member.

55. The apparatus of claim 54, wherein the expansion device comprises an adjustable expansion device.

56. The apparatus of claim 54, wherein the expansion device comprises a rotary expansion device.

57. The apparatus of claim 54, wherein the expansion device comprises a pressurization device.

58. A method of recovering materials from a subterranean zone, comprising:

positioning an expandable tubular member that defines one or more radial passages within a wellbore that traverses the subterranean zone;

positioning a resilient member within the interior of the expandable tubular member;

compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a first portion of the expandable tubular member;

decompressing the resilient member within the interior of the expandable tubular member;
positioning the resilient member to another location within the interior of the expandable tubular member;
compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a second portion of the expandable tubular member; and
recovering materials from the subterranean zone through one or more of the radial passages of the expandable tubular member;
wherein the first and second portions of the expandable tubular member are spaced apart from one another.

59. The method of claim 58, wherein the radial passages of the expandable tubular member are defined between the first and second portions of the expandable tubular member.

60. The method of claim 58, wherein the materials comprise hydrocarbons.

61. The method of claim 58, wherein the materials comprise geothermal energy.

62. The method of claim 58, wherein an annulus defined between the portion of the expandable tubular member between the first and second portions of the expandable tubular member and the wellbore is fluidically isolated from another annulus defined between the expandable tubular member and the wellbore.

63. A system for recovering materials from a subterranean zone, comprising:
means for positioning an expandable tubular member that defines one or more radial passages within a wellbore that traverses the subterranean zone;
means for positioning a resilient member within the interior of the expandable tubular member;
means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a first portion of the expandable tubular member;
means for decompressing the resilient member within the interior of the expandable tubular member;
means for positioning the resilient member to another location within the interior of the expandable tubular member;

means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a second portion of the expandable tubular member; and

means for recovering materials from the subterranean zone through one or more of the radial passages of the expandable tubular member;

wherein the first and second portions of the expandable tubular member are spaced apart from one another.

64. The system of claim 63, wherein the radial passages of the expandable tubular member are positioned between the first and second portions of the expandable tubular member.

65. The system of claim 63, wherein the materials comprise hydrocarbons.

66. The system of claim 63, wherein the materials comprise geothermal energy.

67. A method of radially expanding and plastically deforming at least a portion of an expandable tubular member, comprising:

positioning a resilient member within the interior of the expandable tubular member;

compressing the resilient member within the interior of the expandable tubular member to

radially expand and plastically deform a portion of the expandable tubular member;

positioning an expansion device within the expandable tubular member; and

operating the expansion device to radially expand and plastically deform the expandable tubular member.

68. The method of claim 67, wherein the expansion device comprises an adjustable expansion device.

69. The method of claim 67, wherein the expansion device comprises a rotary expansion device.

70. The method of claim 67, wherein the expansion device comprises a pressurization device.

71. A system for radially expanding and plastically deforming at least a portion of an expandable tubular member, comprising:

means for positioning a resilient member within the interior of the expandable tubular member;

means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member;

means for positioning an expansion device within the expandable tubular member; and
means for operating the expansion device to radially expand and plastically deform the
expandable tubular member.

72. The system of claim 71, wherein the expansion device comprises an adjustable expansion device.

73. The system of claim 71, wherein the expansion device comprises a rotary expansion device.

74. A method of radially expanding and plastically deforming an expandable tubular member,
comprising:

positioning a resilient member within the interior of the expandable tubular member;
compressing the resilient member within the interior of the expandable tubular member to
radially expand and plastically deform a portion of the expandable tubular member;
positioning an expansion device within the expandable tubular member; and
operating the expansion device to radially expand and plastically deform the remaining
portions of the expandable tubular member.

75. The method of claim 74, wherein the expansion device comprises an adjustable expansion device.

76. The method of claim 74, wherein the expansion device comprises a rotary expansion device.

77. The method of claim 74, wherein the expansion device comprises a pressurization device.

78. A system for radially expanding and plastically deforming an expandable tubular member,
comprising:

means for positioning a resilient member within the interior of the expandable tubular
member;
means for compressing the resilient member within the interior of the expandable tubular
member to radially expand and plastically deform a portion of the expandable tubular
member;
means for positioning an expansion device within the expandable tubular member; and
means for operating the expansion device to radially expand and plastically deform the
remaining portions of the expandable tubular member.

79. The system of claim 78, wherein the expansion device comprises an adjustable expansion device.

80. The system of claim 78, wherein the expansion device comprises a rotary expansion device.

81. The system of claim 78, wherein the expansion device comprises a pressurization device.
82. A method of radially expanding and plastically deforming an expandable tubular member, comprising:
- positioning a resilient member within the interior of the expandable tubular member;
 - compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member;
 - and
 - radially expanding and plastically deforming the expandable tubular member using an expansion device that does not comprise the resilient member.
83. The method of claim 82, wherein the expansion device comprises an adjustable expansion device.
84. The method of claim 82, wherein the expansion device comprises a rotary expansion device.
85. The method of claim 82, wherein the expansion device comprises a pressurization device.
86. A system for radially expanding and plastically deforming an expandable tubular member, comprising:
- means for positioning a resilient member within the interior of the expandable tubular member;
 - means for compressing the resilient member within the interior of the expandable tubular member to radially expand and plastically deform a portion of the expandable tubular member; and
 - means for radially expanding and plastically deforming the expandable tubular member that does not comprise the resilient member.
87. The system of claim 86, wherein the means for radially expanding and plastically deforming the expandable tubular member that does not comprise the resilient member comprises an adjustable expansion device.
88. The system of claim 86, wherein the means for radially expanding and plastically deforming the expandable tubular member that does not comprise the resilient member comprises a rotary expansion device.

89. The system of claim 86, wherein the means for radially expanding and plastically deforming the expandable tubular member that does not comprise the resilient member comprises a pressurization device.

90. An apparatus for radially expanding and plastically deforming an expandable tubular member, comprising:

a support member;

a resilient member coupled to the support member,

an actuator operably coupled to the resilient member for controllably compressing the resilient member to thereby radially expand and plastically deform the expandable tubular member; and

an expansion device coupled to the support member that does not comprise the resilient member.

91. The apparatus of claim 90, wherein the expansion device comprises an adjustable expansion device.

92. The apparatus of claim 90, wherein the expansion device comprises a rotary expansion device.

93. The apparatus of claim 90, wherein the expansion device comprises a pressurization device.